

05/27/99
JC544 U.S. PTO

Attorney Docket No.: 3COM-2108.RAPD.US.P

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
Patent Application

I hereby certify that this transmittal of the below described documents is being deposited with the United States Postal Service in an envelope bearing Express Mail Postage and an Express Mail label, with the below serial number, addressed to the Commissioner of Patents and Trademarks, Washington, D.C., 20231, on the below date of deposit.			
Express Mail Label No.:	EJ725861447US	Name of Person Making the Deposit:	TONY CHOU
Date of Deposit:	05/27/99	Signature of the Person Making the Deposit:	<i>Tony Chou</i>

Inventor(s): Kenneth Araujo

Title: A DYNAMIC NETWORK ADDRESS CONFIGURATION SYSTEM AND METHOD

The Commissioner of Patents and Trademarks
Washington, D.C. 20231

Sir:

Transmittal of a Patent Application
(Under 37 CFR §1.53)

Transmitted herewith is the above identified patent application, including:

- ☒ Specification, claims and abstract, totaling 33 pages.
- ☐ Formal drawings, totaling _____ pages.
- ☒ Informal drawings, totaling 6 pages.
- ☒ Declaration and Power of Attorney.
- ☐ Information Disclosure statement.
- ☐ Form 1449
- ☒ Assignment(s)
- ☒ Assignment Recordation Form (duplicate)
- ☐ Preliminary Amendment

FEES DUE

The fees due for filing the specification pursuant to 37 C.F.R. § 1.16 and for recording of the Assignment, if any, are determined as follows:

CLAIMS					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEES
Basic Application Fee					\$760.00
Total Claims	45	Minus 20=	25	X \$18 =	\$450.00
Independent Claims	6	Minus 3=	3	X \$78=	\$234.00
If multiple dependent claims are presented, add \$260.00					\$0.00
Add Assignment Recording Fee of \$40.00 If Assignment document is enclosed					\$40.00
TOTAL APPLICATION FEE DUE					\$1,484.00

A
JC544 U.S. PTO
09/322114
05/27/99

PAYMENT OF FEES

The full fee due in connection with this communication is provided as follows:

1. Not enclosed

☐ No filing fee is to be paid at this time.

2. Enclosed

☒ Filing fee

☒ Recording assignment

☐ Petition fee for filing by other than all the inventors or person on behalf of the inventor where inventor refused to sign or cannot be reached

☐ For processing an application with specification in a non-English language

☐ Processing and retention fee

☐ Fee for international-type search report

☒ The Commissioner is hereby authorized to charge any additional fees associated with this communication or credit any overpayment to Deposit Account No.: 23-0085. A duplicate copy of this authorization is enclosed.

☒ A check in the amount of \$800.00

☒ A check in the amount of \$684.00

☐ Charge any fees required or credit any overpayments associated with this filing to Deposit Account No.: 23-0085.

This application is filed pursuant to 37 C.F.R. § 1.53 in the name of the above-identified Inventor(s).


Please direct all correspondence concerning the above-identified application to the following address:

WAGNER, MURABITO & HAO LLP
Two North Market Street, Third Floor
San Jose, California 95113
(408) 938-9060

☒ This transmittal ends with this page.

Respectfully submitted,

Date: 5/27/99

By: 
John P. Wagner, Jr.
Reg. No. 35,398

UNITED STATES PATENT APPLICATION

FOR

A DYNAMIC NETWORK ADDRESS CONFIGURATION
SYSTEM AND METHOD

Inventor:
KENNETH ARAUJO

Prepared by:
WAGNER, MURABITO & HAO LLP
Two North Market Street
Third Floor
San Jose, California 95113

DYNAMIC NETWORK ADDRESS CONFIGURATION SYSTEM AND METHOD

5

FIELD OF THE INVENTION

The present invention relates to the field of network communications.

10 More particularly, the present invention relates to a system and method for establishing a communication path within a communications network.

BACKGROUND OF THE INVENTION

15 Reliable communication of information is critical to the advancement of a modern society. In particular, electronic technologies that rely on data communications are utilized in a number of applications to achieve advantageous results, such as increased productivity and reduced costs in analyzing and communicating data, ideas and trends in most areas of business, science, education and entertainment. Often these advantageous results are
20 realized and maximized through the use of distributed resources situated in remote locations from one another. Computer systems are one example of an electronic technology that often rely on distributed resources to run complicated applications. Usually computer systems combine processing and data storage capabilities of multiple computing units through networking. The
25 advantages of networking resources has resulted in a significant expansion in the number of devices coupled to networks and this growth has resulted in a tremendous need for connectivity between numerous devices and networks.

However, long distance communications between computers located in different sites is usually expensive.

5 Networks can be arranged in numerous configurations comprising a variety of network types. Some of the most popular types of networks comprise Ethernet (coaxial cable or twisted-pair cable), token ring, Fiber Distributed Data Interface (FDDI), Frame Relay, Integrated Services Digital Network (ISDN), X.25, and Synchronous Data Link Control (SDLC). Typically these networks are arranged in local area networks (LANs) and wide area
10 networks (WANs). Some users utilize public WANs as virtual private networks (VPNs). Commonly, connections over such WANs are typically accomplished using, for example, circuit switched networks. Due to the prolonged duration of typical connections utilized in conventional networking environments, and due to the high cost required to use circuit switched
15 networks, communication paths established over such circuit switched network are extremely expensive. As a result, establishing a communication path between a first device and a second device over circuit switched network has severe cost-based disadvantages associated therewith.

20 In one prior art attempt to provide a communication path between a first device and a second device, static addresses are employed in, for example, and internet environment. In the prior art, in order for a first device to establish a communication link over a communications network (e.g. the internet), the first device must know the address of the second device.
25 However, in some communications networks (e.g. the internet) such device addresses are dynamic. That is, each device may be assigned a new address each time the device connects to the communications network. Thus, the first

device (e.g. a computer at a first site of a business) may not know the proper internet protocol (IP) address of the second device (e.g. another computer at a second site of the business). In an attempt to resolve this issue users of the first and second devices may purchase static (i.e. unchanging) IP addresses for their respective devices. As a result, the users can inform desired parties of the device's static IP address. Hence, the first device will then know the address of the second device. Unfortunately, such static address are limited in supply and are extremely expensive. In fact, such static addresses are often too expensive for the average network user.

10

Thus, a need exists for a method and system for efficiently establishing a communication path between a first device and a second device via a communications network. A further need exists for a method and system for efficiently establishing a communication path between a first device and a second device wherein the system and method meets the above need and does not require communication paths to be established using circuit switched networks for prolonged periods of time. Sill another need exists for a system and method for efficiently establishing a communication path between a first device and a second device wherein the system and method meets the above-listed needs and does not require the use of static addresses.

15

20

SUMMARY OF THE INVENTION

The present invention provides a method and system for efficiently establishing a communication path between a first device and a second device via a communications network. The present invention further provides a method and system for efficiently establishing a communication path between a first device and a second device wherein the system and method accomplishes the above-listed achievement and does not require communication paths to be established using circuit switched networks for prolonged periods of time. The present invention also provides a method and system for efficiently establishing a communication path between a first device and a second device wherein the system and method accomplishes the above-listed achievements and does not require the use of static addresses.

In one embodiment, the present invention is comprised of a first device which is adapted to communicate over a communications network. The present invention is also comprised of a second device which is adapted to communicate via a communications network, and, more specifically, is adapted to communicate with the first device via the communications network. The present invention is further comprised of a controller which is adapted to be coupled to the communications network. The controller of the present invention is adapted to store address information for the first device, and to store address information for the second device therein. The controller is further adapted to provide the address information of the second device to the first device such that a communication path can be efficiently established between the first device and the second device via the communications network. In so doing, the present embodiment provides for the efficient establishment of a communications path between the first device and the

second device via the communications network without requiring that the first device and the second device have a static address. Additionally, the present embodiment does not require communication paths to be established using circuit switched networks for prolonged periods of time.

5

These and other benefits and advantages of the present invention will no doubt become obvious to those of ordinary skill in the art after having read the following detailed description of the preferred embodiments which are illustrated in the various drawing figures.

09/23/94 11:22:50

DESCRIPTION OF THE DRAWINGS

The accompanying drawings which are incorporated in and form a part of this specification, illustrate embodiments of the invention and together with the description, serve to explain the principles of the invention:

5

Figure 1A is block diagram illustrating one embodiment of a dynamic network address minimal configuration system of the present invention.

10 Figured 1B is a block diagram illustrating one embodiment of a dynamic network address registration system of the present invention.

Figure 2 is a block diagram showing one embodiment of a dynamic network address minimal configuration system of the present invention.

15 Figure 3 is an example of one embodiment of a dynamic IP network address mapping table of the present invention.

Figure 4 is a flow chart showing one embodiment of a dynamic network address configuration method of the present invention.

20

FIGURE 5 is a flow chart of steps performed in accordance with one embodiment of the present claimed invention.

25 The drawings referred to in this description should be understood as not being drawn to scale except if specifically noted.

BEST MODE FOR CARRYING OUT THE INVENTION

Reference will now be made in detail to the preferred embodiments of the invention, a dynamic network address configuration system and method, examples of which are illustrated in the accompanying drawings. While the invention will be described in conjunction with the preferred embodiments, it will be understood that they are not intended to limit the invention to these embodiments. On the contrary, the invention is intended to cover alternatives, modifications and equivalents, which may be included within the spirit and scope of the invention as defined by the appended claims. Furthermore, in the following detailed description of the present invention, numerous specific details are set forth in order to provide a thorough understanding of the present invention. However, it will be obvious to one ordinarily skilled in the art that the present invention may be practiced without these specific details. In other instances, well known methods, procedures, components, and circuits have not been described in detail as not to unnecessarily obscure aspects of the current invention.

The system and method of the present invention provides information regarding a dynamic IP network address associated with a first device (e.g., a server, PC, NAT, etc.) to a second device (e.g., a router or NAT) with minimal or no manual configuration of the second device. In one embodiment of the present invention, a first network device establishes its own dynamic IP network address via a secondary circuit or channel (e.g. a circuit switched network) and utilizes a primary circuit or channel (e.g. the internet) to register its dynamic IP network address with a dynamic address network configuration system (controller) and to participate in principal network communications. For example, a first network device such as a PC establishes its own dynamic

IP network address by communicating with an ISP over a D-channel of an ISDN connection and then communicates with a dynamic address network configuration system or other devices via circuit switched calls on a B-channel. A dynamic address network configuration system of the present invention

5 tracks dynamic network addresses assigned to devices participating in a network and provides assigned dynamic network address information to devices that request it.

Figure 1A is block diagram illustrating dynamic network address

10 minimal configuration system 100. Dynamic network address minimal configuration system 100 comprises a first device, device A 110, a second device, device B 120, a controller hereinafter referred to as a dynamic network address registration system/controller 130 and communication network 150 (also referred to as network 150). Network 150 is coupled to first device A 110,

15 second device B 120 and dynamic network address registration system/controller 130. Device A 110 and Device B 120 are devices used to facilitate interaction and communications via network 150 (e.g., a personal computer, NAT, router, etc.). For purposes of the present discussion, network 150 includes primary and secondary communication circuits or channels (e.g. a

20 circuit switched network and also e.g. the internet) and allows communication paths between devices coupled to network 150 to be established thereon. Dynamic network address registration system/controller 130 stores information regarding the assignment of dynamic network addresses to devices.

25

Dynamic network address minimal configuration system 100 provides information regarding the assignment of a dynamic network address to devices

coupled to dynamic network address minimal configuration system 100 and facilitates the automatic configuration of network components with minimal manual intervention. For example, device A 110 utilizes a secondary communications circuit or channel to access network 150 and obtains a

5 dynamic network address. Device A 110 utilizes a primary communication circuit or channel to establish communications with dynamic network address registration system/controller 130 and forwards information regarding the dynamic network address assigned to device A 110. Dynamic network address registration system/controller 130 stores information regarding the association

10 of device A 110 and the dynamic network address assigned to device A 110. Dynamic network address registration system/controller 130 also transmits to device A 110 a network address associated with dynamic network address registration system/controller 130. Device B 120 also utilizes a secondary circuit or channel to establish a dynamic network address and uses a primary

15 circuit or channel to transmit to dynamic network address registration system/controller 130 information regarding the association between device B 120 and its dynamic network address. Then device A 110 and device B 120 utilize dynamic network address registration system/controller 130 to facilitate automatic downloading of information regarding each other's assigned dynamic

20 network address and automatic configuration of network components.

Figure 1B is a block diagram illustrating one embodiment of dynamic network address registration system/controller 130. In one embodiment, dynamic network address registration system/controller 130 is included in an

25 intermediate device coupled to a network. Dynamic network address registration system/controller 130 comprises means for coupling to a communications network, for example, communications port 131; means for

storing address information of a first device therein and means for storing
address information of a second device therein, for example, communication
frame analysis component 132; and means for providing the address
information of the second device to the first device such that a communication
5 path can be efficiently established between the first device and the second
device via the communications network, for example, dynamic address
mapping component 133. Communications port 131 is coupled to
communication frame analysis component 132 and dynamic address mapping
component 133. Communication frame analysis component 132 is coupled to
10 dynamic address mapping component 133. The components of dynamic
network address registration system/controller 130 interact with one another
to facilitate communications with devices having dynamic addresses.

Communications port 131 transmits and receives communication
15 frames to and from devices coupled to dynamic network address registration
system/controller 130. In one embodiment of dynamic network address
registration system/controller 130, communications port 131 transmits and
receives communication frames via multiple communication circuits or
channels including a primary and a secondary communications circuit or
20 channel. For example communications port 131 transmits communication
frames via different networks including the Internet or a direct modem
switched circuit communication link that are used for primary communication
circuits or secondary communication circuits.

25 Communication frame analysis component 132 is adapted to analyze
information included in a communication frame. Communication frame
analysis component 132 examines the information included in a

communication frame and ascertains the name of a principal destination device. The principal destination device is the desired device that a user ultimately wants to communicate with and has been assigned a dynamic network address. Communication frame analysis component 132 determines

5 if the communication frame is requesting information regarding an assigned dynamic network address or forwarding a dynamic network address for registration in dynamic network address registration system/controller 130. If the communication frame is requesting information regarding an assigned dynamic network address, dynamic network address registration

10 system/controller 130 provides the information to the requesting device. If the communication frame is forwarding a dynamic network address for registration in dynamic network address registration system/controller 130, communication frame analysis component 132 issues an instruction to dynamic address mapping component 140 to map a dynamic address to the

15 name of a particular principal destination device if a communication frame.

Dynamic address mapping component 133 is adapted to map a dynamic network address to a device name. Communication frames forwarding a dynamic network address for inclusion in dynamic address mapping component

20 140 also include information regarding the name of a destination device that has been assigned the dynamic network address. Dynamic address mapping component 140 retains a record of the association between the named device and dynamic IP network address. In one embodiment of the present invention dynamic address mapping component 140 disregards a prior association if the

25 prior dynamic IP network address or device name is presented to dynamic address mapping component 140 in association with a new device or new dynamic IP network address. In one embodiment the dynamic address

mapping component 140 includes a directory name service (DNS) that provides a mapping of designated names in a uniform resource locating (URL) protocol to dynamic IP network addresses.

5 Although dynamic network address minimal configuration system 100 is described in terms of one embodiment of the present invention, it should be appreciated the present invention is also well suited for use in other configuration. For example, in some situations dynamic network address minimal configuration system 100 is implemented in networks comprising a
10 LAN and a WAN. In one embodiment, dynamic network address minimal configuration system 100 is utilized to establish a virtual private network (VPN) via the Internet. In some embodiments tracking dynamic addresses by dynamic network address minimal configuration system 100 is controlled by software. In yet other embodiments the present invention is implemented in
15 combinations of software, hardware and firmware which automatically track dynamic address assignments and forwards the relevant dynamic address information to and from devices coupled to dynamic network address minimal configuration system 100.

20 Figure 2 is a block diagram illustrating dynamic network address minimal configuration system 200, one embodiment of the present invention. Network address minimal configuration system 200 comprises NAT 215, router 291, PC 211, PC 212, PC 213, PC 240, PC 293, server 292, dynamic network address registration system/controller 130 and network 281. NAT
25 215 is coupled to PC 211, PC 212, and PC 213 in a configuration that comprises a first LAN in a home. Router 291 is coupled to PC 291 and Server 292 in an arrangement that comprises a second LAN at a business. Internet

web 281 is coupled to NAT 215, router 291, PC 240 and dynamic network address registration system/controller 130 in a configuration that comprises a WAN. Each device coupled to the WAN has access at its location to at least one ISDN basic rate interface (BRI) for connectivity to the wide area network

5 Internet Web 281 and an always on dynamic ISDN (AODI) feature is supported for each of these BRIs. AODI is a feature of ISDN that uses an ISDN signaling channel (e.g., D-channel) to have a low speed connection that is active (e.g., to an ISP).

10 Devices coupled to network address minimal configuration system 200 utilize communication paths of network address minimal configuration system 200 and the present invention to establish communications to devices that are assigned dynamic IP network addresses. Dynamic network address registration system/controller 130 tracks the assignment of dynamic IP

15 network addresses to devices included in network address minimal configuration system 200. PC 211, PC 212, PC 213, PC 240, and PC 291 permit users to interact with devices coupled to network address minimal configuration system 200. Server 292 is a system that provides services including database access, network management, and centralized file storage.

20 Router 291 router provides traffic control and filtering functions between communication points on both sides of router 291. NAT 215 is associated with a primary LAN including PC 211, 212 and 213 and facilitates the transmission of communications from the primary LAN to internet web 281 by translating between a primary LAN IP network address for a device and an internet web

25 281 network address. Internet Web 281 facilitates communications between devices coupled to it.

Router 291 and NAT 215 also maintain a list of the directory numbers corresponding to other devices coupled to network address minimal configuration system 200, such as dynamic network address registration system/controller 130. Maintaining directory numbers in router 291 and NAT 5 215 enables circuit switched calls to be placed to other devices included in network address minimal configuration system 200. In one embodiment of router 291 and NAT 215, numbers corresponding to other devices coupled to network address minimal configuration system 200 are entered individually via a management interface and in another embodiment they are downloaded from 10 a central management station (not shown).

Utilizing the connections of network address minimal configuration system 200 and facilitated by the present invention, multisite communications associated with VPNs are established via dynamic IP network addresses with 15 minimal manual configuration. Router 291 and NAT 215 make an AODI connection to their respective local ISP over a D channel when they initially come on line and obtain assignment of a dynamic network address. In one embodiment, local D-channel connections of network address minimal configuration system 200 are relatively low cost connections. Router 291 and 20 NAT 215 then call up the dynamic network address registration system/controller 130 via circuit switched calls (e.g., over a ISDN B-channel). Utilizing switched circuit calls, router 291 and NAT 215 register their dynamic IP network address (corresponding to its AODI connection) with dynamic network address registration system/controller 130. It also obtains the IP 25 network address assigned to the dynamic network address registration system/controller 130. In one embodiment of the present invention, the IP network address of dynamic network address registration system/controller

130 is actually assigned via an AODI link to a router that processes communications to and from a site at which dynamic network address registration system/controller 130 is located. After obtaining the appropriate dynamic IP network address information router 291 and NAT 215 tear down
5 the circuit switched calls with dynamic network address registration system/controller 130.

Once router 291 and NAT 215 tear down the circuit switched calls with dynamic network address registration system/controller 130, they establish
10 VPN connections with dynamic network address registration system/controller 130 via respective local ISPs for router 291 and NAT 215. By establishing a VPN via their respective local ISP providers, router 291 and NAT 215 are able to avoid long distance toll charges for communications with dynamic network address registration system/controller 130. Router 291 and NAT 215 use the
15 VPN across the Internet to communicate with the dynamic network address registration system/controller 130's server or router and obtain a list of other devices (e.g., routers or NATs) that have registered with the dynamic network address registration system/controller 130, as well as dynamic IP network addresses associated with such devices. In one embodiment, router 291 and
20 NAT 215 periodically poll the dynamic network address registration system/controller 130 via their VPN connection to dynamic IP network address information and find out if any new devices have registered. Using these dynamic IP network addresses, devices (e.g., a router or NAT) at each site in network address minimal configuration system 200 is able to establish
25 VPN connections with other devices to exchange information (e.g., router control data, user data, etc.). In one embodiment, these VPN connections are established via D channels or B channels if there is a lot of information to be

communicated. As more communication traffic is involved the capacity of the call is increased by including B-channels and using multi-link PPP across the D-channel and the B-channel.

5 Devices included in network address minimal configuration system 200 also monitor the status of their communications with the dynamic network address registration system/controller 130. If communications are lost between devices included in network address minimal configuration system 200 (e.g., a router or NAT) and dynamic network address registration
10 system/controller 130, after a predetermined time the device (e.g., router or NAT) will attempt to make a circuit switched call to the dynamic network address registration system/controller 130. In one embodiment, this permits VPN recovery in situations when the AODI connection between dynamic network address registration system/controller 130 and its respective ISP goes
15 down and comes back up, resulting in the assignment of a new dynamic IP network address to dynamic network address registration system/controller 130. Alternatively, after establishing a new AODI connection, dynamic network address registration system/controller 130 contacts each of the previously registered devices (e.g., routers and NATs) included in network
20 address minimal configuration system 200 using VPN connections across the Internet to inform the other devices (e.g., routers and NATs) of the new IP network address assigned to dynamic network address registration system/controller 130.

25 One embodiment of dynamic address mapping component 140 includes a dynamic IP network address mapping table for devices included in a network. Figure 3 is an example of one embodiment of a dynamic IP network address

mapping table 300. Dynamic IP network address mapping table 300 comprises multiple network rows arranged in two columns including a first column 310 and a second column 320. Entries in a first column 310 indicate the name of a particular device. Data in the second column 320 designates dynamic IP network address that is currently assigned to the device named in the same row in column 310. Information in dynamic IP network address mapping table 300 is utilized by NAT 215 and router 291 during their network communication operations. For example, if a PC 211 is attempting to communicate with server 292 but does not have information regarding an address for server 292, PC 211 issues a request to dynamic network address registration system/controller 130 to provide an IP network address. Dynamic network address registration system/controller 130 determines if server 292 is listed as an entry in the first column 310 of dynamic IP network address mapping table 300 and if there is a match transmits the dynamic IP network address indicated in the same row of dynamic IP network address mapping table 300 to PC 211. Dynamic IP network address mapping table 300 is automatically constructed by dynamic network address registration system/controller 130.

Figure 4 is a flow chart of dynamic network address configuration method 400 one embodiment of the present invention. Dynamic network address configuration method 400 facilitates identification of dynamic addresses for use in configuring network devices with minimal manual input. In one embodiment of the present invention, dynamic network address configuration method 400 establishes dynamic network addresses via a secondary communications circuit (e.g., a secondary channel) and a VPN via a primary communications circuit (e.g., a primary channel).

662350-1122E60

In Step 410 dynamic network address configuration method 400 obtains a dynamic network address via a secondary communications circuit. In one embodiment of dynamic network address configuration method 400 a network device establishes a network communication link via a secondary circuit and is assigned a dynamic network address. For example, a PC establishes an Internet connection with an ISP provider via a D channel of an ISDN and is assigned a dynamic network IP address.

10 Information regarding the assigned dynamic network address is transmitted to a network address registration system in Step 420. The information regarding the assigned dynamic network address is transmitted via a primary communication system. For example a PC transmits information regarding its assigned dynamic network address via a B channel of and ISDN. Information regarding the assigned dynamic network address and its association with a network device (e.g., the PC) is stored in the dynamic network address registration system.

20 In Step 430 of dynamic network address configuration method 400 information regarding the assignment of a dynamic network address is communicated from the network address registration system to network devices. In one embodiment, a network address associated with a dynamic network address registration system and a dynamic network address associated with a particular network device is forwarded to another network device in an Internet session established via a primary circuit (e.g., a B channel of a ISDN interface). In one embodiment dynamic network address configuration method 400 automatically polls the dynamic network address

registration system to determine if there are updates to information regarding a registered dynamic address.

Hence, the present invention is a system and method that provides
5 network source devices with information regarding a dynamic address assigned to a network destination device. The system and method expedites the establishment of network sessions and supplies dynamic destination address information automatically with a minimum amount of manual network administration intervention. The system and method reduces the amount of
10 user configuration input and interaction required to setup a NAT or router for participation in a VPN session. The system and method facilitates efficient automatic configuration of NATs and routers with dynamic destination network addresses and simplifies connection of communication paths that transport communication frames over one or more networks.

15 Referring now to Figure 5, a flow chart 500 of steps performed in accordance with one embodiment of the present invention is shown. The steps of Figure 5 will be discussed in conjunction with the detailed description set forth above and with the features of Figures 1A, 1B, 2, 3, and 4. As shown in
20 Figure 5, at step 502, in this embodiment, a first device (e.g. device A 110) contacts a controller (e.g. dynamic network address registration system/controller 130) to determine the status of a second device (e.g. device A 110). In one embodiment, the first device obtains, from the controller, via a second communications network (e.g. a circuit switched network) the
25 information as to whether or not the second device is coupled to the first communications network (e.g. the internet).

Referring still to step 502 of Figure 5, in one embodiment, the first device determines from the controller that the second device is not coupled to the first communications network (e.g. the internet). In such a case, the first device instructs the second device, via a second communications network (e.g. a circuit switched network), to couple to the first communications network and report the second device's dynamic address information to the controller. This instruction for the second device is accomplished briefly thereby minimizing the costs associated with the use of the second communications network. The first device then couples to the first communications network, to the controller, and subsequently to the second device. Thus, the controller is aware of and is able to store the dynamic address information of the first device and the dynamic address information of the second device. In so doing, the present embodiment, allows for the efficient establishment of communication path between the first device and the second device via the first communications network. Hence, the present embodiment allows for the establishment of the communication path without requiring that the first device and the second device have a static address. Additionally, the present embodiment does not require communication paths to be established using circuit switched networks for prolonged periods of time.

20

Referring still to step 502, in another embodiment the first device determines from the controller that the second device is not coupled to the first communications network (e.g. the internet). In such a case, the controller instructs the second device, via a second communications network (e.g. a circuit switched network), to couple to the first communications network and report the second device's dynamic address information to the controller. This

662290-4722E60
instruction for the second device is accomplished briefly thereby minimizing the costs associated with the use of the second communications network. The first device then couples to the first communications network, to the controller, and subsequently to the second device. Thus, the controller is aware of and is
5 able to store the dynamic address information of the first device and the dynamic address information of the second device. In so doing, the present embodiment, allows for the efficient establishment of communication path between the first device and the second device via the first communications network. Hence, the present embodiment allows for the establishment of the
10 communication path without requiring that the first device and the second device have a static address. Additionally, the present embodiment does not require communication paths to be established using circuit switched networks for prolonged periods of time.

15 At step 504, the first device obtains, from the controller, address information for the second device. That is, as the second device couples to the communications network, the controller is aware of and is able to store the dynamic address information of the second device. As mentioned above, in the present embodiment, the first device also provides the controller with the
20 dynamic address information of the first device.

Referring now to step 506, the present invention then establishes a communication path via a communications network (e.g. the internet) between the first device and the second device. As mentioned above, in the present
25 embodiment, the controller enable efficient establishment of the communication path between the first device and the second device, via the communications network, without requiring the first device and the second

device to have static addresses. In yet another embodiment, the controller enables establishment of a virtual private network (VPN) between the first device and the second device via the communications network.

5 Thus, the present invention provides a method and system for efficiently establishing a communication path between a first device and a second device via a communications network. The present invention further provides a method and system for efficiently establishing a communication path between a first device and a second device wherein the system and method
10 accomplishes the above-listed achievement and does not require communication paths to be established using circuit switched networks for prolonged periods of time. The present invention also provides a method and system for efficiently establishing a communication path between a first device and a second device wherein the system and method accomplishes the
15 above-listed achievements and does not require the use of static addresses.

 The foregoing descriptions of specific embodiments of the present invention have been presented for purposes of illustration and description. They are not intended to be exhaustive or to limit the invention to the precise
20 forms disclosed, and obviously many modifications and variations are possible in light of the above teaching. The embodiments were chosen and described in order to best explain the principles of the invention and its practical application, to thereby enable others skilled in the art to best utilize the invention and various embodiments with various modifications as are suited to
25 the particular use contemplated. It is intended that the scope of the invention be defined by the Claims appended hereto and their equivalents.

CLAIMS

1. A dynamic network address registration system, comprising:
a first device;
a second device, said first device and said second device adapted to
5 communicate via a communications network; and
a controller coupled to said communications network, said controller
adapted to store address information for said first device therein, said controller
adapted to store address information for said second device therein, said
controller further adapted to provide said address information of said second
10 device to said first device such that a communication path can be efficiently
established between said first device and said second device.

2. The dynamic network address registration system of Claim 1 wherein
said communication path is efficiently established between said first device
15 and said second device without requiring said first device and said second device
to have static addresses.

3. The dynamic network address registration system of Claim 1 wherein
said controller is adapted to establish a virtual private network (VPN) between
20 said first device and said second device via said communications network.

4. The dynamic network address registration system of Claim 1 wherein
said first device, said second device, and said controller are further adapted to
be coupled to a second communications network.
25

5. The dynamic network address registration system of Claim 4 wherein
said controller is adapted to inform said first device, via said second

communications network, as to whether or not said second device is coupled to said communications network.

6. The dynamic network address registration system of Claim 4 wherein
5 said controller is adapted to instruct said second device, via said second communications network, to couple to said communications network.

7. The dynamic network address registration system of Claim 4 wherein said communications network is the internet.

10

8. The dynamic network address registration system of Claim 4 wherein said second communications network is a circuit switched network.

15

9. A method for establishing a communication path between a first device and a second device, said method comprising the steps of:

a) said first device contacting a controller to determine the status of said second device;

b) said first device obtaining, from said controller, address information for said second device; and

20

c) establishing a communication path via a communications network between said first device and said second device.

25

10. The method for establishing a communication path between a first device and a second device as recited in Claim 9 wherein step a) comprises:

said first device obtaining, from said controller, via a second communications network, information as to whether or not said second device is coupled to said communications network.

11. The method for establishing a communication path between a first device and a second device as recited in Claim 10 wherein step a) further comprises the step of:

5 a1) provided said second device is not coupled to said communications network, said first device instructing said second device, via said second communications network, to couple to said communications network and to said controller.

10 12. The method for establishing a communication path between a first device and a second device as recited in Claim 10 wherein step a) further comprises the step of:

15 a1) provided said second device is not coupled to said communications network, said controller instructing said second device, via said second communications network, to couple to said communications network and to said controller.

20 13. The method for establishing a communication path between a first device and a second device as recited in Claim 9 wherein step b) further comprises the step of:

b1) said first device providing said controller with address information for said first device.

25 14. The method for establishing a communication path between a first device and a second device as recited in Claim 9 wherein step c) comprises efficiently establish said communication path between said first device and

said second device, via said communications network, without requiring said first device and said second device to have static addresses.

15. The method for establishing a communication path between a first
5 device and a second device as recited in Claim 9 wherein step c) comprises establishing a virtual private network (VPN) between said first device and said second device via said communications network.

16. The method for establishing a communication path between a first
10 device and a second device as recited in Claim 9 wherein said communications network is the internet.

17. The method for establishing a communication path between a first
device and a second device as recited in Claim 9 wherein said second
15 communications network is a circuit switched network.

18. A controller for efficiently establishing a communication path
between a first device and a second device, said controller comprising:
means for coupling said controller to a communications network;
20 means for storing address information for said first device therein;
means for storing address information for said second device therein;
means for providing said address information of said second device to
said first device such that a communication path can be efficiently established
between said first device and said second device via said communications
25 network.

19. The controller of Claim 18 wherein said communication path is efficiently established between said first device and said second device without requiring said first device and said second device to have static addresses.

5 20. The controller of Claim 18 wherein said controller is adapted to establish a virtual private network (VPN) between said first device and said second device via said communications network.

10 21. The controller of Claim 18 wherein said first device, said second device, and said controller are further adapted to be coupled to a second communications network.

15 22. The controller of Claim 21 wherein said controller is adapted to inform said first device, via said second communications network, as to whether or not said second device is coupled to said communications network.

20 23. The controller of Claim 21 wherein said controller is adapted to instruct said second device, via said second communications network, to couple to said communications network.

24. The controller of Claim 21 wherein said communications network is the internet.

25 25. The controller of Claim 21 wherein said second communications network is a circuit switched network.

26. A dynamic network address minimal configuration system comprising:

a communication network adapted to provide communication paths;
said communications network includes primary and secondary communication
5 circuits;

network devices coupled to said communication network, said network
devices adapted to facilitate interaction and communications via said
communication network; and

a dynamic network address registration system coupled to said
10 communication network, said dynamic network address registration system
adapted to store information regarding the assignment of dynamic network
addresses to said network devices and provide said information to other
network devices.

27. The dynamic network address minimal configuration system of
15 Claim 26 in which said network devices are adapted to establish a network
connection via said secondary circuit and receive an assignment of a dynamic
network address which said network device then provides to said dynamic
network address registration system via said primary communication circuit.

28. The dynamic network address minimal configuration system of
20 Claim 26 in which said communication network includes an integrated services
digital network (ISDN) basic rate interface (BRI) for connectivity to a wide
area network and an always on dynamic ISDN (AODI) feature is supported for
25 said ISDN BRI.

29. The dynamic network address minimal configuration system of Claim 28 in which said network devices are adapted to establish a network connection via a D channel of said ISDN BRI and receive an assignment of a dynamic network address which said network device then provides to said dynamic network address registration system via a B channel of said ISDN BRI.

30. The dynamic network address minimal configuration system of Claim 26 in which one of said network devices is a router.

10

31. The dynamic network address minimal configuration system of Claim 26 in which one of said network devices is a network address translator (NAT).

15

32. The dynamic network address minimal configuration system of Claim 26 in which said intermediate device is adapted to facilitate the establishment of a virtual private network (VPN) communication link via the Internet between a source network device and a destination network device.

20

33. The dynamic network address minimal configuration system of Claim 32 wherein said VPN is implemented via said primary communication circuit.

34. The dynamic network address minimal configuration system of Claim 26 wherein said communications network includes a wide area network (WAN).

25

35. The dynamic network address minimal configuration system of Claim 26 wherein said communications network includes a local area network (LAN).

5 36. A dynamic network address registration apparatus, comprising:
an intermediate device adapted to facilitate automatic configuration of network devices with information related to dynamic network internet protocol (IP) addresses, said intermediate device comprising;

10 a communications port for receiving and transmitting communication frames via a communications network;
a communication frame analysis component coupled to said communications port, said communication frame analysis component adapted to analyze information included in a communication frame and recognize if said communication frame is requesting or providing a network IP address; and
15 an address mapping component coupled to said communication frame analysis component, said address mapping component adapted to map one of said dynamic network IP addresses to one of said network devices and provide information regarding the association of other of said network devices with other of said dynamic network IP addresses.

20 37. The dynamic network address registration system of Claim 36 wherein said network devices are coupled to secondary communications circuits and primary communication circuits.

25 38. The dynamic network address registration system of Claim 36 wherein said intermediate device is utilized to establish a VPN is established via said communications network.

39. The dynamic network address registration system of Claim 36 wherein said communication frame analysis component determines if a communication frame includes information to be mapped in said address mapping component.

40. The dynamic network address registration system of Claim 36 wherein said communication frame analysis component determines if a communication frame is requesting information from said address mapping component.

41. The dynamic network address registration system of Claim 36 wherein said communication frame analysis component extracts information identifying a desired location from a communication frame.

42. A dynamic network address configuration method comprising the steps of:

a) obtaining a dynamic network address via a secondary communications circuit;

b) transmitting information regarding said dynamic network address to a network address registration system via a primary communication system; and

c) communicating information regarding the assignment of a dynamic network address from said network address registration system to network devices.

43. The dynamic network address configuration method of Claim 42 in which step b further comprises the step of storing in said dynamic network address registration system information regarding the association of a device and a dynamic network address assigned to said device.

5

44. The dynamic network address configuration method of Claim 42 in which step c further comprises the steps of forwarding to said network device a network address associated with dynamic network address registration system.

10

45. The dynamic network address configuration method of Claim 42 in which step c further comprises the steps of polling said dynamic network address registration system to determine if there are updates to information regarding a registered dynamic address.

65/2250 "H" 2250

DYNAMIC NETWORK ADDRESS CONFIGURATION SYSTEM AND METHOD

ABSTRACT

5 A dynamic network address registration system and method. In one
embodiment, the present invention is comprised of a first device which is
adapted to communicate over a communications network. The present
invention is a also comprised of a second device which is adapted to
communicate via a communications network, and, more specifically, is
10 adapted to communicate with the first device via the communications
network. The present invention is further comprised of a controller which is
adapted to be coupled to the communications network. The controller of the
present invention is adapted to store address information for the first device,
and to store address information for the second device therein. The controller is
15 further adapted to provide the address information of the second device to the
first device such that a communication path can be efficiently established
between the first device and the second device via the communications
network. In so doing, the present embodiment provides for the efficient
establishment of a communications path between the first device and the
20 second device via the communications network without requiring that the first
device and the second device have a static address.

Dynamic Network Address
Minimal Configuration
System

100

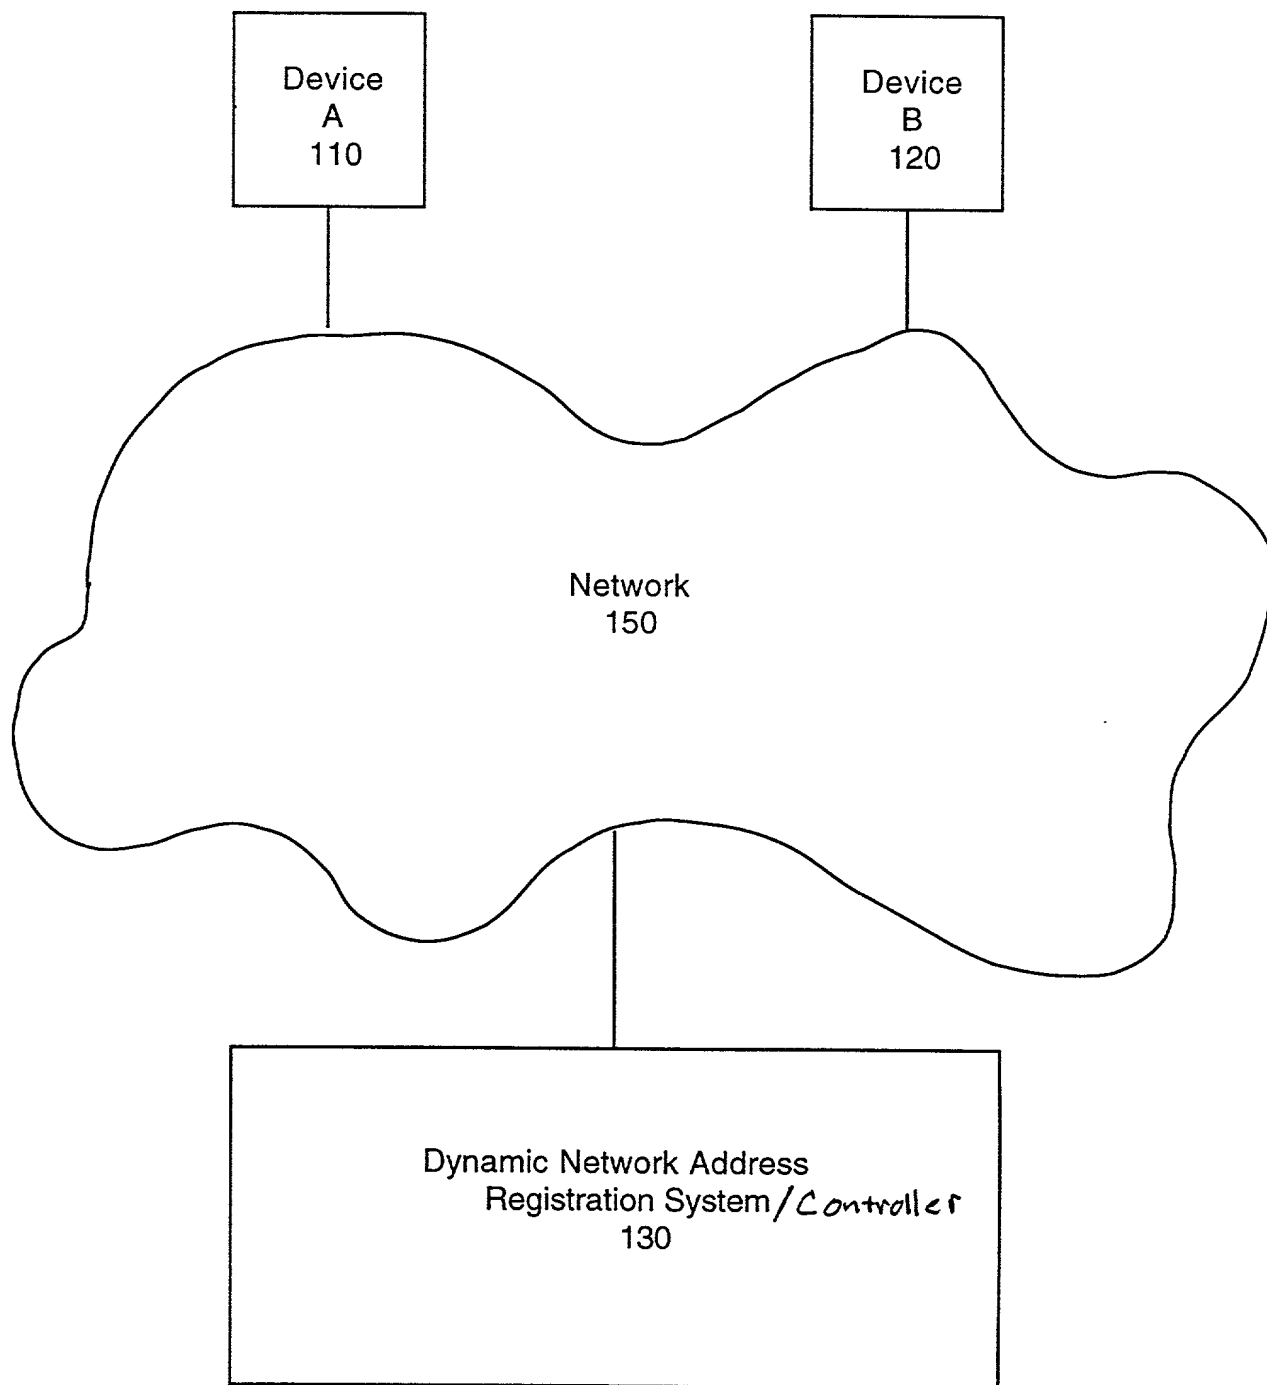


Fig. 1A

130

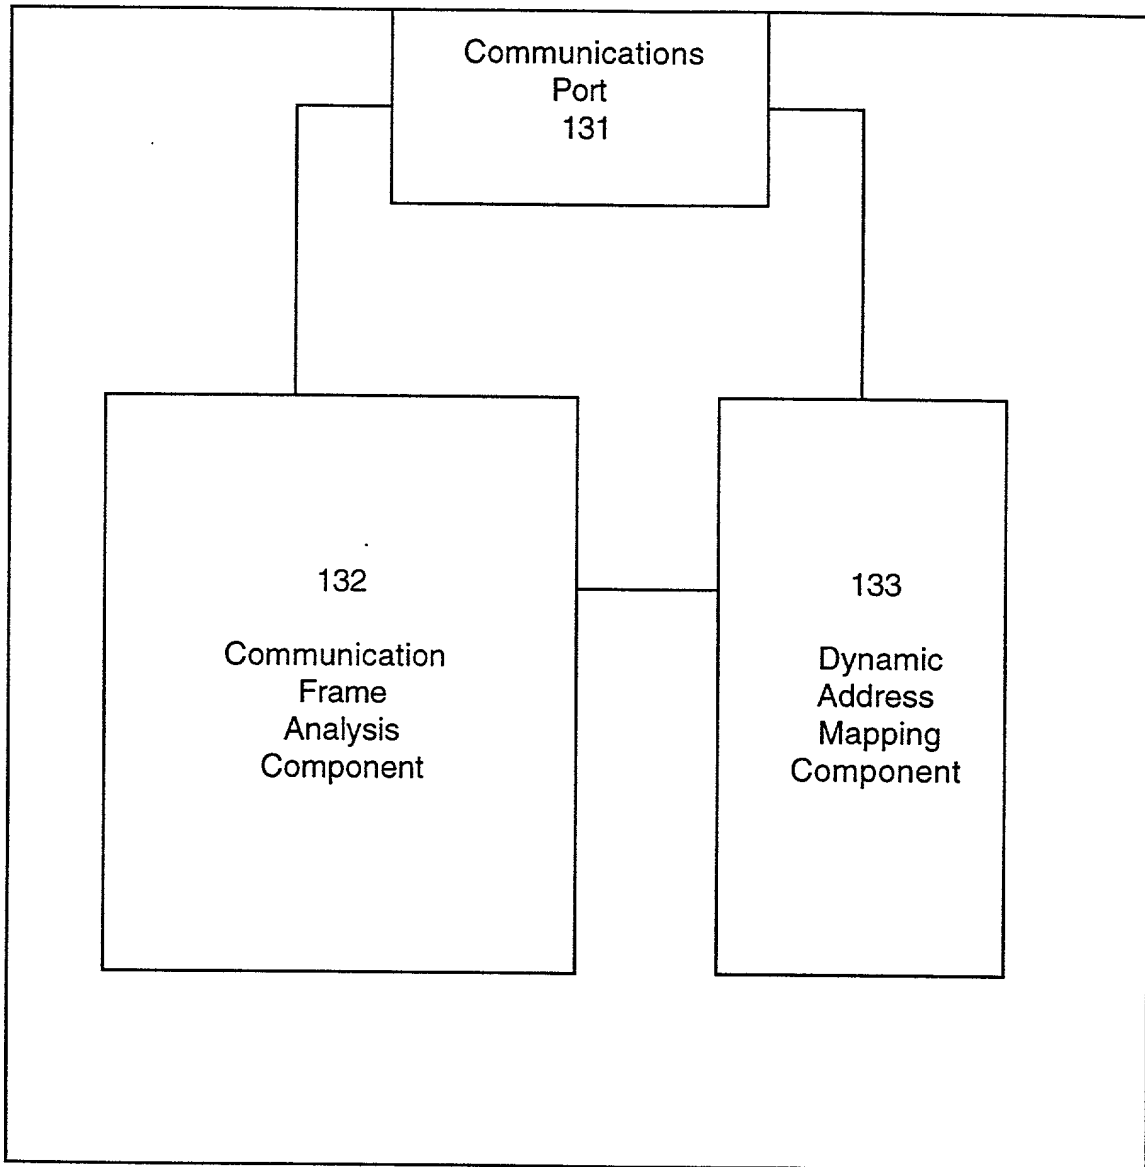


Fig 1B

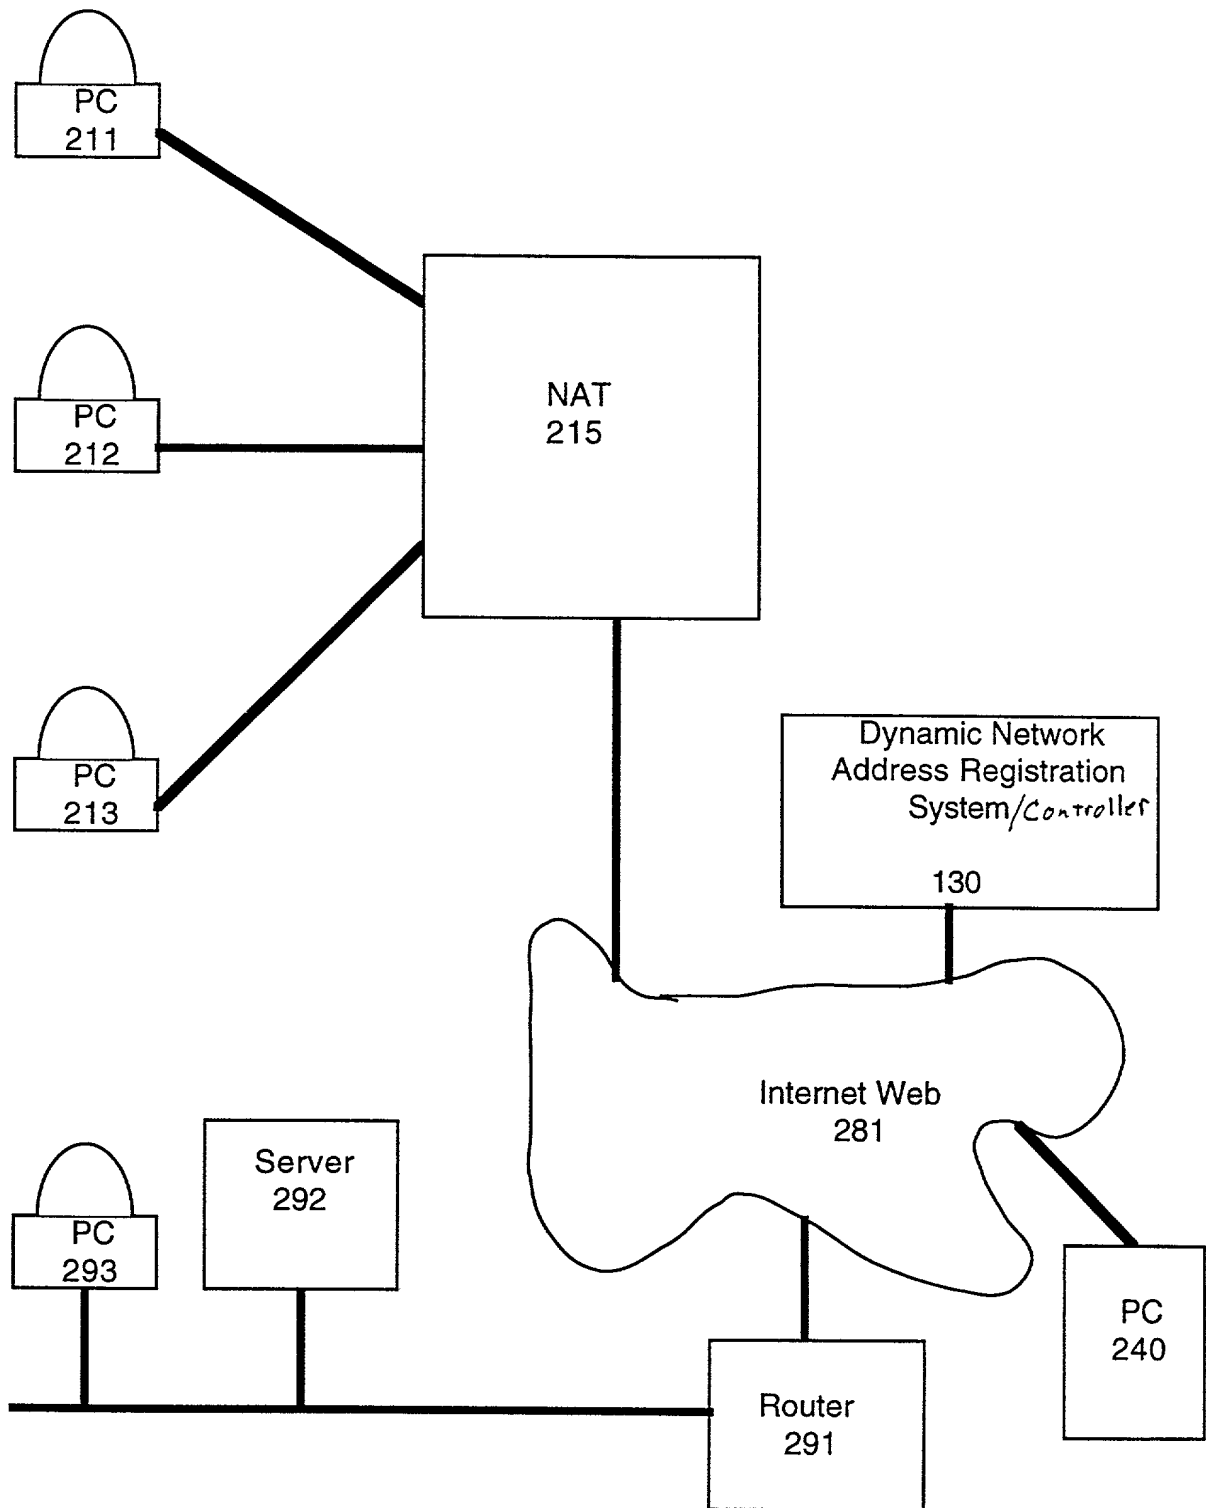


Fig. 2

NAME OF A PARTICULAR DEVICE	DYNAMIC NETWORK ADDRESS CURRENTLY ASSIGNED TO DEVICE
PC 211	192.1.370
SEVER 292	192.1.380

FIG. 3

400

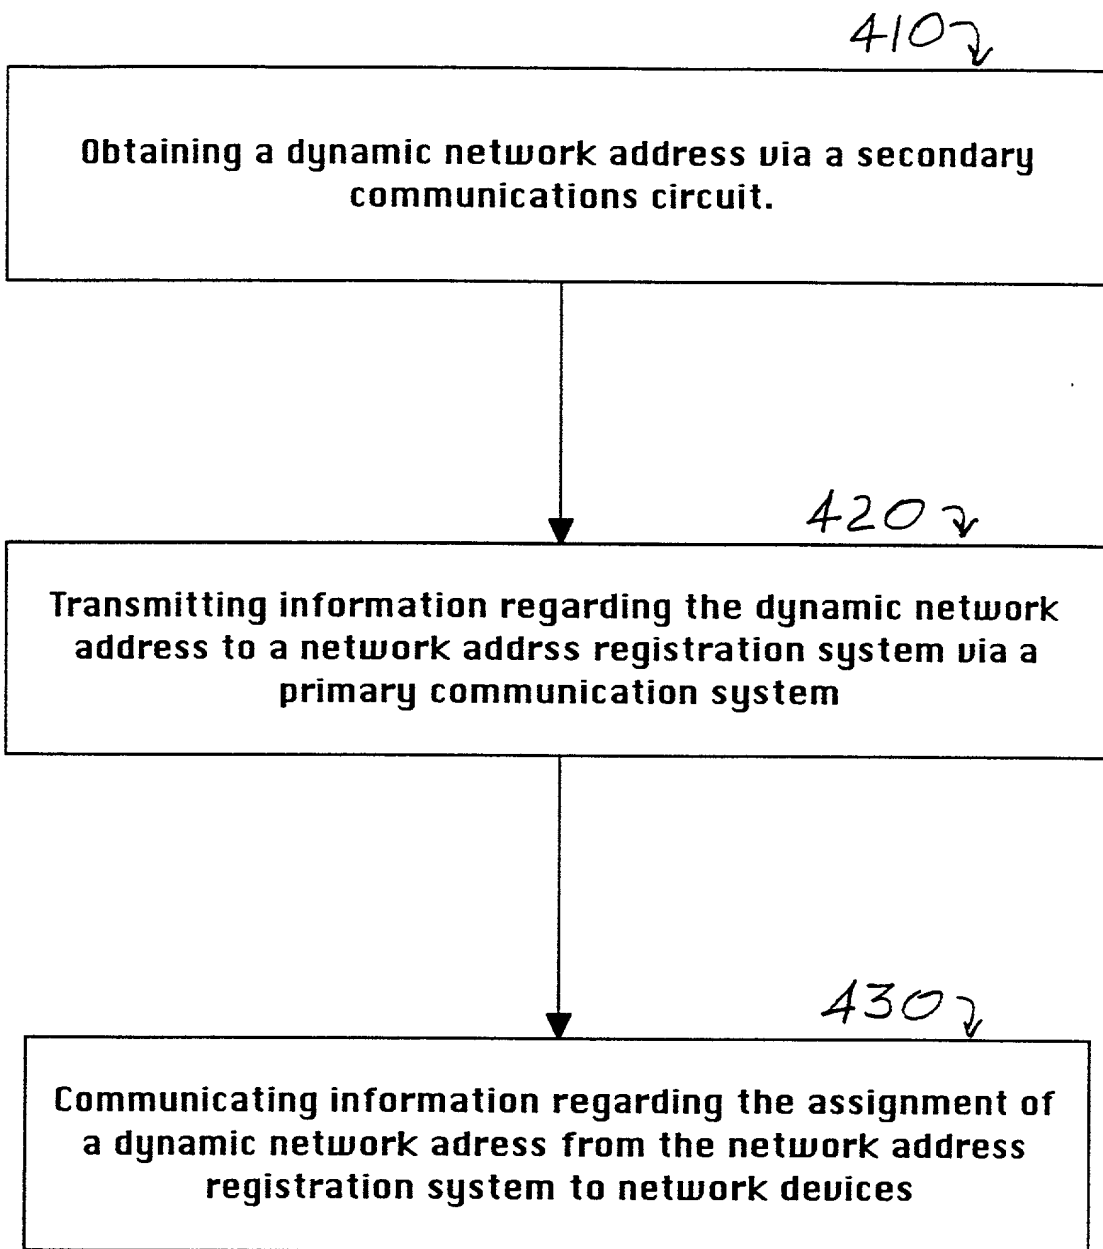


FIG 4

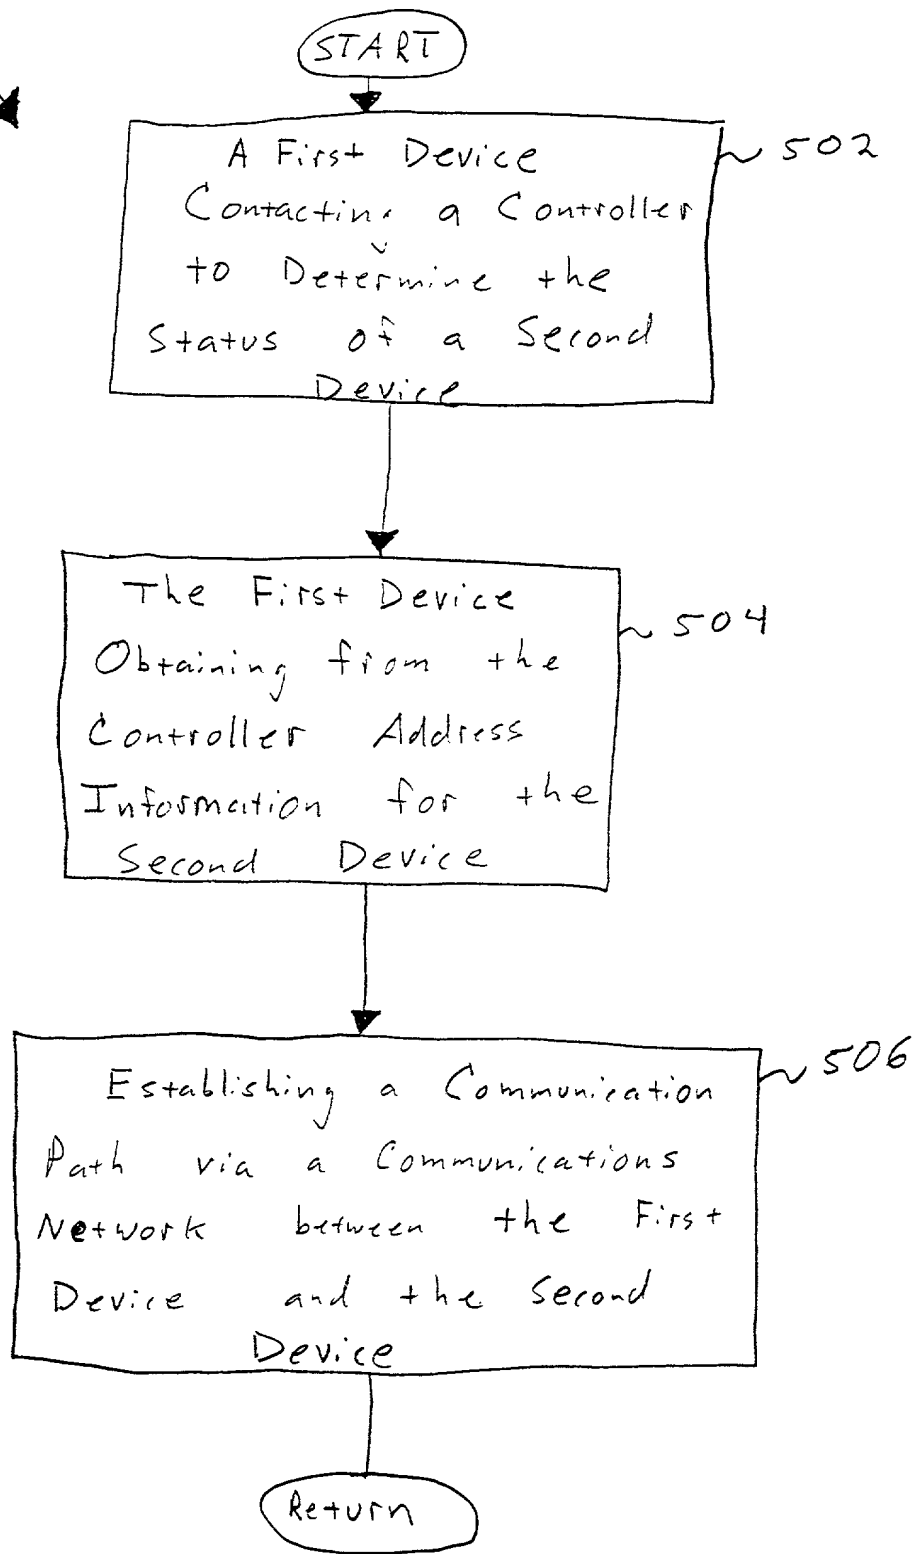


Fig. 5

Declaration and Power of Attorney for a Patent Application

Declaration

As below named inventor, I hereby declare that my residence post office address, and citizenship are as stated below my name. Further, I hereby declare that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

A DYNAMIC NETWORK ADDRESS CONFIGURATION SYSTEM AND METHOD

the specification of which:

 X is attached hereto, or
 was filed on as application serial no. : and
 was amended on

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above; and

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

Foreign Priority Claim

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Number	Country	Date Filed	Priority Claimed
..... yes no
..... yes no

U.S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Serial Number	Filing Date	Status (patented/pending/abandoned)
.....
.....

Power of Attorney

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent Trademark Office connected therewith.

James P. Hao	Registration No.: 36,398
Anthony C. Murabito	Registration No.: 35,295
John P. Wagner	Registration No.: 35,398
Glenn D. Barnes	Registration No.: 42,293
Wilfred H. Lam	Registration No.: 41,923
Patrick W. Ma	Registration No.: 44,215

Send Correspondence to:

WAGNER, MURABITO & HAO LLP
Two North Market Street, Third Floor
San Jose, California 95113
(408) 938-9060

Signatures

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor: Kenneth Araujo

Inventor's Signature Kenneth Araujo Date 5/27/99
Residence Sunnyvale, California Citizenship USA
(City State)
P.O. Address 180 Elm Court, Apt. 812, Sunnyvale, California 94086

Full Name of Second/Joint Inventor: _____

Inventor's Signature _____ Date _____
Residence _____ Citizenship _____
(City State)
P.O. Address _____

Full Name of Third/Joint Inventor: _____

Inventor's Signature _____ Date _____
Residence _____ Citizenship _____
(City State)
P.O. Address _____